

Wamco FR1 NVIS Red polymeric filter for incandescent and LEDs


Applications

NVIS Red indicators for “compliant” Class B and “compatible” Class A applications outperform MIL-L-85762A Class B compliant filters when used in a Class A environment.

Size

Cut to customer-specified dimensions in a standard thickness of 0.043-inches.

FR1

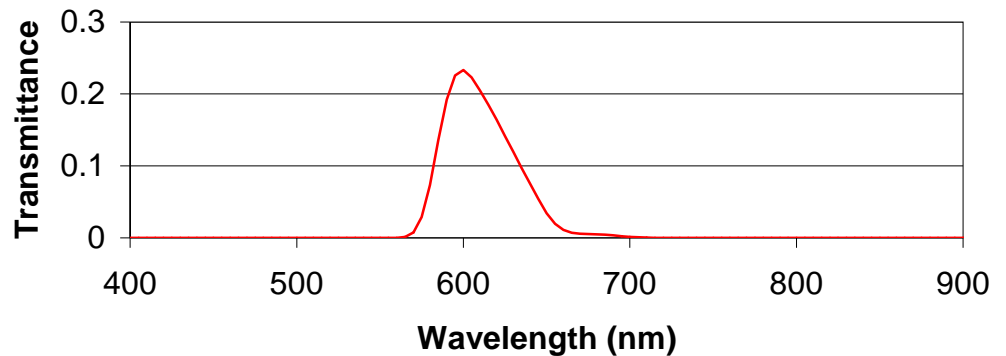

Typical performance

Source	Y%	u'	v'	NRa*	NRb*
2100 K	8	0.424	0.536	4E-6	1E-6
1800 K	8	0.429	0.536	5E-6	2E-6
Red LED**	19	0.436	0.535	5E-8	5E-9

* Scaled to 15.0 fL.

** Recommended 610 nm peak LED

FR1 rev A



Wamco
Aerospace and automotive lighting

wamcoinc.com
714.545.5560